

TECHNICAL DATA SHEET


DAB12-44EV

ELECTRIC VEHICLE applications are wide and varied with many durability & power demands placed firmly on the batteries shoulders. OUR ELECTRIC VEHICLE AGM always delivers when you need it, whatever your DC requirement in general EV applications. Tough ABS case with INSERT TERMINALS as standard, smaller sizes with FASTON. Special Active Material Formulation & AGM Technology delivers cranking amps, general power and long/deep discharges. GOOD CYCLE LIFE and resistance to mechanical stress and the elements all in one battery.



	Dimensions mm - kg						Dimensions Inches - lbs						Cold Cranking Amps		
	Length	Width	Height Auto	Height Insert	Height Battery	Weight	Length	Width	Height Auto	Height Insert	Height Battery	Weight	20°C (68°F)	0°C (32°F)	-18°C (0°F)
DAB12-44EV	198	167	175	158	157	13.3	7.80	6.57	6.89	6.22	6.18	29.33	488	345	230

	Volts	Thread size mm	Reserve Capacity - Mins					Capacity - Ampere Hour*						
			75 Amps	25 Amps	20 Amps	15 Amps	8 Amps	100 Hr	48 Hr	20 Hr	10 Hr	5 Hr	3 Hr	1 Hr
DAB12-44EV	12	6	12	56	82	118	248	53.1	49.9	46.2	42.1	37.7	34.3	27.5

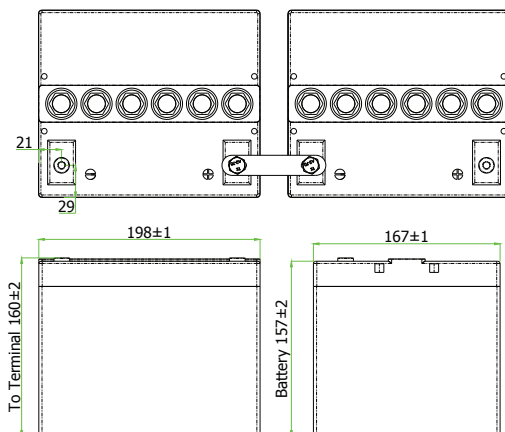

EV Charging - To obtain maximum cycle life from your EV battery it is important that a suitable charging profile is used. For information about our range of chargers and the Our recommended charging profile contact us.

NOTE : All our AGM batteries are true cycling batteries, plate chemistry is specifically for cyclic applications.